


INDUSTRIAL EMBEDDED COMPUTER IEC-902 SERIES



Industrial Embedded Computer with Intel® Ultra 5/7/9 Processor via socket 1851, W880 Chipset, Supports: 4- 2.5GbE LAN, 8- USB 3.2 Gen2, 1- VGA, 1- DisplayPorts, 1- HDMI, 1- RS232/422/485, 2- 2.5" Removable SSD SATA 3.0, 2- 2.5" Internal SATA 3.0 SSD or U.2/U.3/NVMe, 6-RS232/422/485, Onboard TPM2.0, 2- M.2 M Key, 2- PCI Express x16 Gen5, 1- PCI Express x4 Gen4, 3- PCI Express x4 Gen3, 1- PCI Express x1, Integrated: 12-48 VDC @ 800W, 750W AC or 1200W AC Power Supply

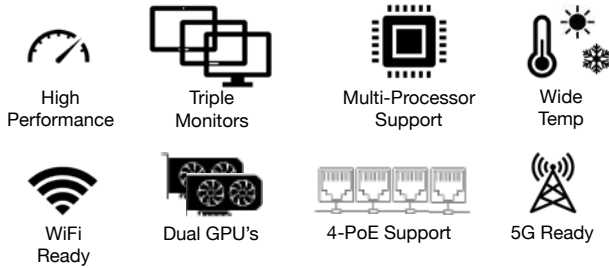

FEATURES

- Intel® Ultra 5/7/9, 14- Core ~ 24- Core processors 5.20GHz~5.70GHz Max
- Up to 128GB DDR5 5600MHz UDIMM
- 2• 2.5" Removable SATA 3.0 ports (RAID 0/1/5/10 Support)
- 2• 2.5" Internal SATA 3.0 ports (RAID 0/1/5/10 Support) or 2.5" Internal U.2/U.3/NVMe
- 8• USB 3.2 Gen2 ports, 6• RS232/422/485
- 1• HDMI, 1• DisplayPorts, 1• VGA
- 2• PCI Express x 16 Gen5, 1• PCI Express x 4 Gen4, 3• PCI Express x4 Gen3, 1• PCI Express x1, 2• M.2 M Key, 1• M.2 B Key, 1• M.2 E Key
- Supports 2- Dual Slot NVIDIA® GPU's or 1- Three Slot NVIDIA® GPU
- 2• 4- Port 2.5GbE Isolated PoE Module
- 1• 5G Module
- Industrial IP40 Rated Design
- Wide range operating temperature supported
- Integrated: 12-48 VDC @ 800W, 750W AC or 1200W AC Power Supply

SYSTEM SPECIFICATIONS

Processor	Intel® U5-245K 5.20 GHz Max Intel® U7-265K 5.50 GHz Max Intel® U9-285K 5.70 GHz Max
Processor Generation	Arrow Lake-S™ Refresh Intel® Core™ Ultra Processors (Series 2)
Processor Cores	14 • U5-245K 20 • U7-265K 24 • U9-285K
Memory Storage	Up to 128GB DDR5 5600MHz UDIMM 2 • M.2 SSD 2 • 2.5" Removable 3.0 SATA drive bays 2 • 2.5" SATA 3.0 SSD internal drive bays or 2.5" Internal U.2/U.3/NVMe drive bays
Chipset	W880
Graphics	Intel® Graphics
LAN Controller	4 • Intel® I226-LM 2.5GbE LAN port
TPM	Infineon® SLB9672
System I/O	Front 1 • Power Button 2 • 2.5" Removable 3.0 SATA drive bays 2 • RS232/422/485 ports (1 • RS232/422/485 on-board) 4 • RS232 ports 1 • DisplayPort 1 • HDMI 1 • VGA 8 • USB 3.2 Gen2 ports 4 • USB 3.2 Gen1 ports 1 • Line-out 1 • Mic 2 • WiFi RP-SMA connectors 1 • Power Connector 7 • PCI Express slots
BIOS	AMI
Watchdog Timer	256 levels, 1~255 sec.
Expansion Interface	2 • PCIe x 16 Gen5 1 • PCIe x 4 Gen4 3 • PCIe x 4 Gen3 1 • PCIe x 1 2 • M.2 M Key, 1 • M.2 B Key, 1 • M.2 E Key
System Indicator	1 • blue LED for system power-on 1 • amber LED for SSD active



MECHANICAL SPECIFICATIONS

Color	Blue & Silver
Construction	Industrial grade heavy steel
Dimensions (W x H x D)	352.30mm x 253mm x 404.80mm (13.87" x 9.96" x 15.93")
Mounting	Wall mount bracket (optional)

POWER SUPPLY

Power Supply	Integrated: 12-48 VDC @ 800W, 850W AC or 1200W AC Power Supply
--------------	--

REGULATORY SPECIFICATIONS

Operating Temperature	-0°C ~ 60°C (32°F ~ 140°F)
EMI/EMC	CE standards applied (EN 55022 / EN 55024 / EN 55032) FCC 47 CFR Part 15 Subpart B RoHS UL Pending Certification
Vibration	Operating: 1G 5-500Hz, 3 Axes according to IEC60068-2-64

INDUSTRIAL EMBEDDED COMPUTER IEC-902 SERIES



ORDERING INFORMATION

Base	IEC-902 Industrial Embedded Computer, Supports Ultra 5/7/9 Processors, Intel W880 Chipset, 2- 2.5" Removable SATA 3.0 Drives, 1- Power button, 8- USB 3.2 Gen2 Ports, 4- Intel i226-LM 2.5GbE LAN Ports, 2- HDMI Ports, 2- DP Port, 1- Audio Jack: (Line-Out) (Mic-In), 2- PCIe x8, 4- PCIe x4, 1- PCIe x1, 2- M.2 M Keys, 1- M.2 E Key, 1- M.2 B Key, 2- Internal 2.5" SATA 3.0 Drives or U.2/U.3/ NVMe Drives
IEC-902_-	

WARRANTY

Manufacturer Warranty	2 Year Warranty
Extended Warranty	TotalCare Protection 3 or 5 Year Extended
Expected Life Cycle	5 Years

CONFIGURABLE & ACCESSORIES

Processor	Intel® U5-245K 5.20 GHz Max, Intel® U7-265K 5.50 GHz Max, Intel® U9-285K 5.70 GHz Max
Power Supply	12-48 VDC @ 800W, 750W AC or 1200W AC Power Supply
RS232/422/485	2• RS232/422/485, 4• RS232
2 • M.2 M Key SSD	250GB, 500GB, 1TB, 2TB, 4TB
2 • 2.5" Removable SATA 3.0 SSD	250GB, 500GB, 1TB, 2TB, 4TB
2 • 2.5" Internal U.2/U.3/NVMe SSD	1TB, 2TB, 4TB
2 • 2.5" Internal SATA 3.0 SSD	250GB, 500GB, 1TB, 2TB, 4TB
DDR5 UDIMM	16GB, 32GB, 64GB, 128GB

WiFi module	Intel® 9260 802.11ac/a/b/g/n Wi-Fi / Bluetooth 5.1 M.2 Module Intel® AX210 Wi-Fi / 802.11ax/ac Wi-Fi / Bluetooth 5.2 M.2 Module
PCI Express x16	Support Multiple NVIDIA® GPU versions 4- Port 2.5GbE PoE Module (Verizon®) 5G Embedded Quectel RM520N-GL, Includes: 4- 5G Antennas (AT&T®, T-Mobile®) 5G Embedded Quectel® RM520N-GL, Includes: 4- 5G Antennas
PCI Express x16	Support Multiple NVIDIA® GPU versions 4- Port 2.5GbE PoE Module (Verizon®) 5G Embedded Quectel RM520N-GL, Includes: 4- 5G Antennas (AT&T®, T-Mobile®) 5G Embedded Quectel® RM520N-GL, Includes: 4- 5G Antennas
4 • PCI Express x4	4- Port 2.5GbE PoE Module (Verizon®) 5G Embedded Quectel RM520N-GL, Includes: 4- 5G Antennas (AT&T®, T-Mobile®) 5G Embedded Quectel® RM520N-GL, Includes: 4- 5G Antennas
Wall mount bracket kit	6640229021 with Vibration Isolators
Operating System	Windows® 10 IoT Enterprise 2021 LTSB Value (i3/i5), Windows® 10 IoT Enterprise 2021 LTSB High End (i7/i9), Windows® 10 Professional 64bit, Windows® 11 IoT Enterprise 2024 Value (i3/i5), Windows® 11 IoT Enterprise 2024 High End (i7/i9), Windows® 11 Professional 64bit, Ubuntu® Desktop 24.04 LTS 64bit